


## EXAMPLE PARKING CONDITIONS

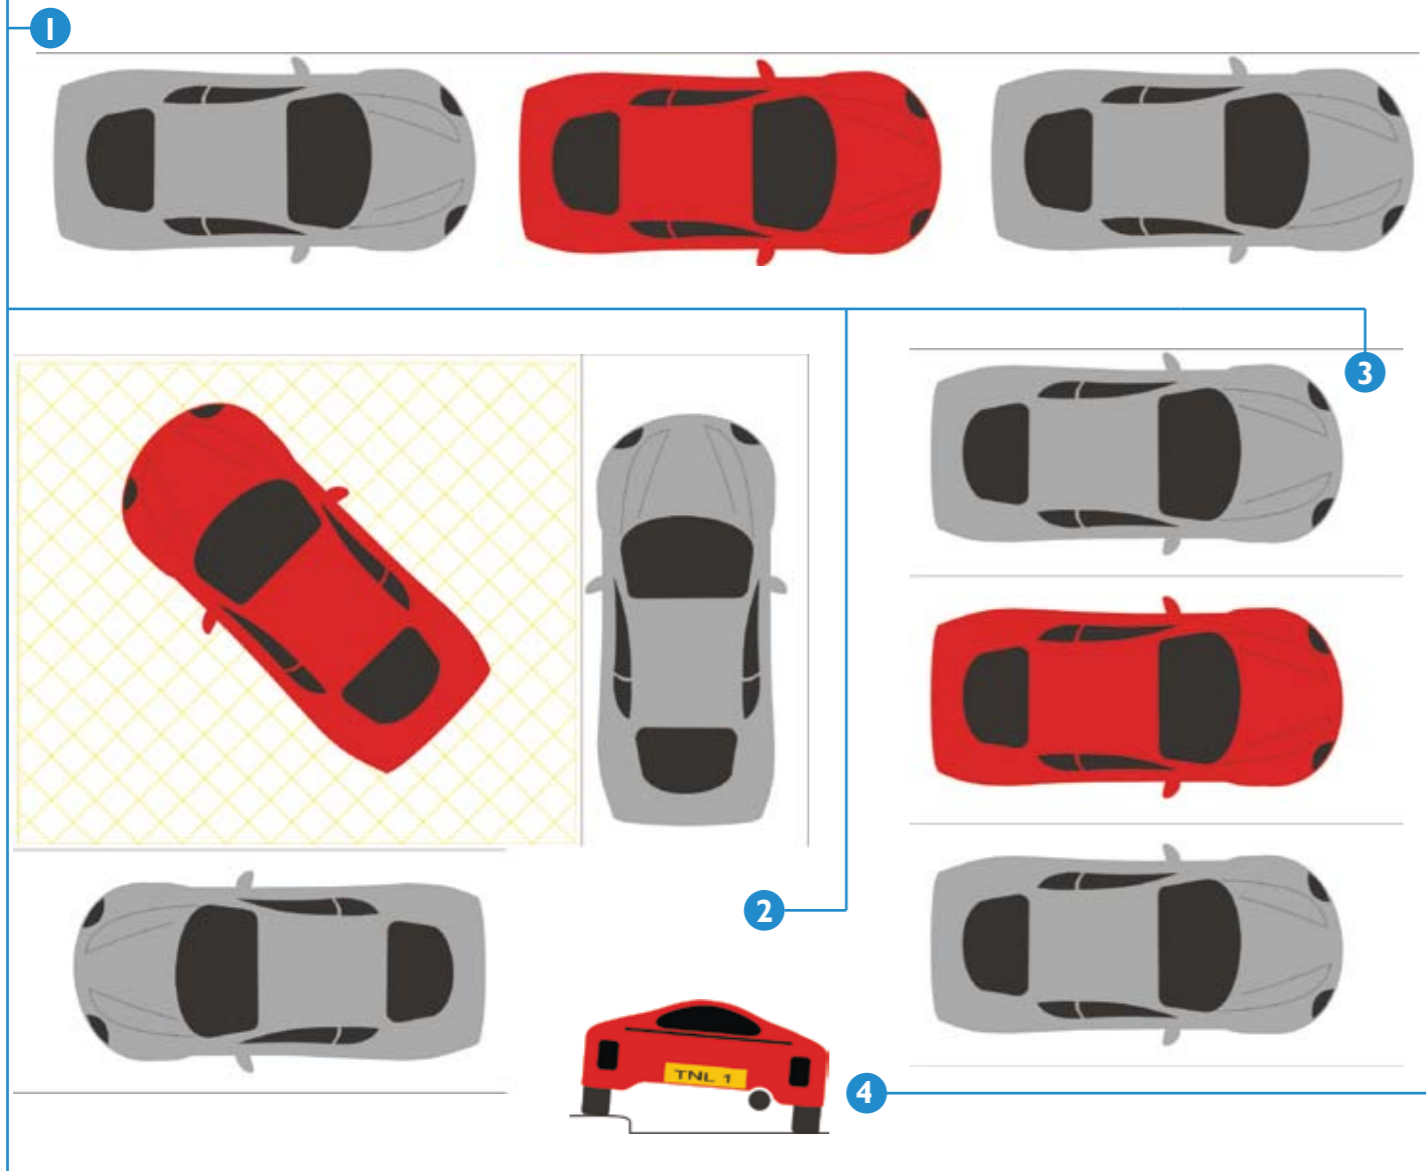

## COMPARISON OF REMOVAL VEHICLES

CONDITION	REAR LOADING UNIT	SIDE LOADING UNIT	TIP-LIFT TOTAL LIFT UNIT
1	✗ (No access)	✓	✓
2	✗ (Must be lifted out)	✗ (Must be lifted out)	✓
3	✓	✗ (No access)	✓
4	✓	✗ (Unable to reach far wheels)	✓


50%

25%


100%

## YARD CAPACITY DIAGRAMS PER REMOVAL VEHICLE (76m x 56m Area)


SIDE LOADING UNIT

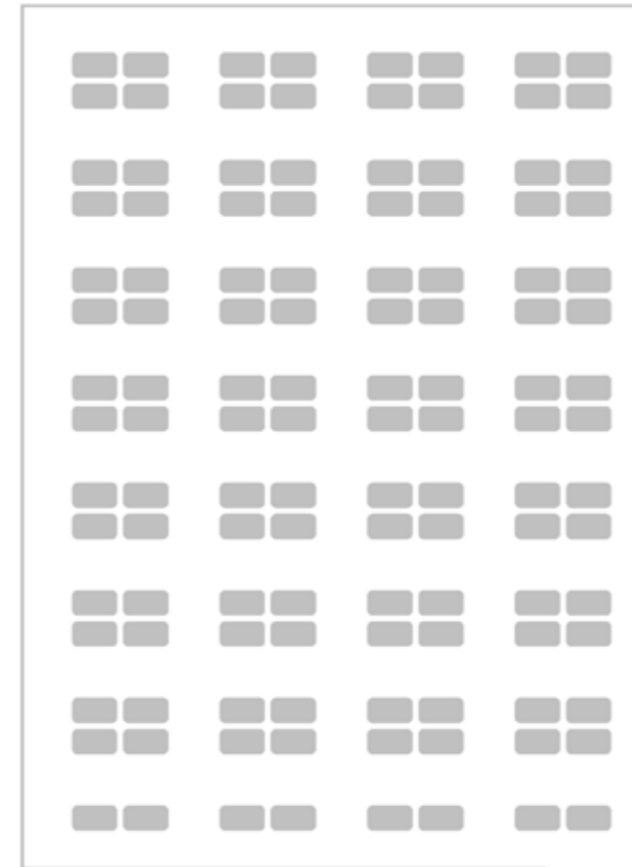

REAR LOADING UNIT

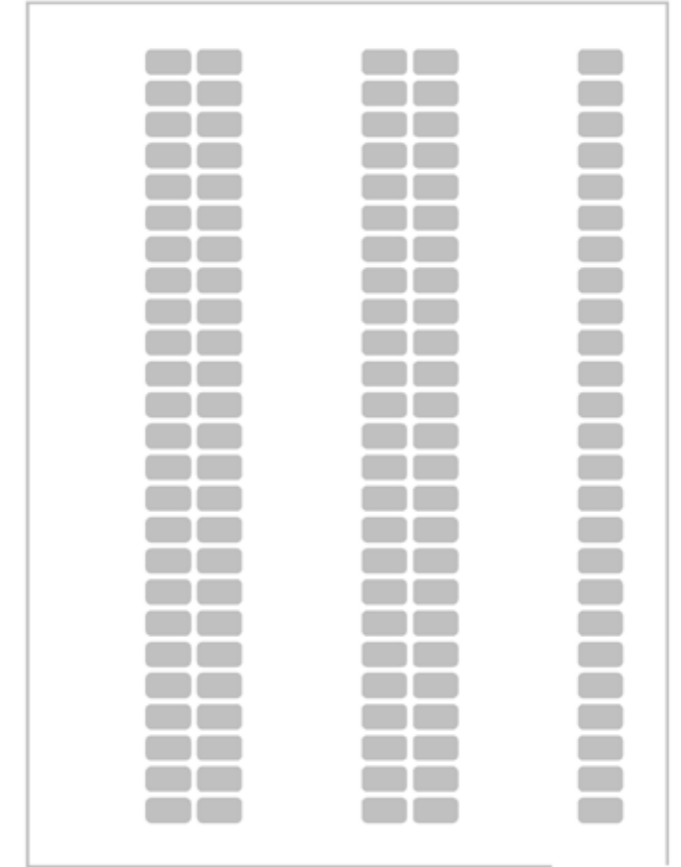

TIP-LIFT TOTAL LIFT UNIT

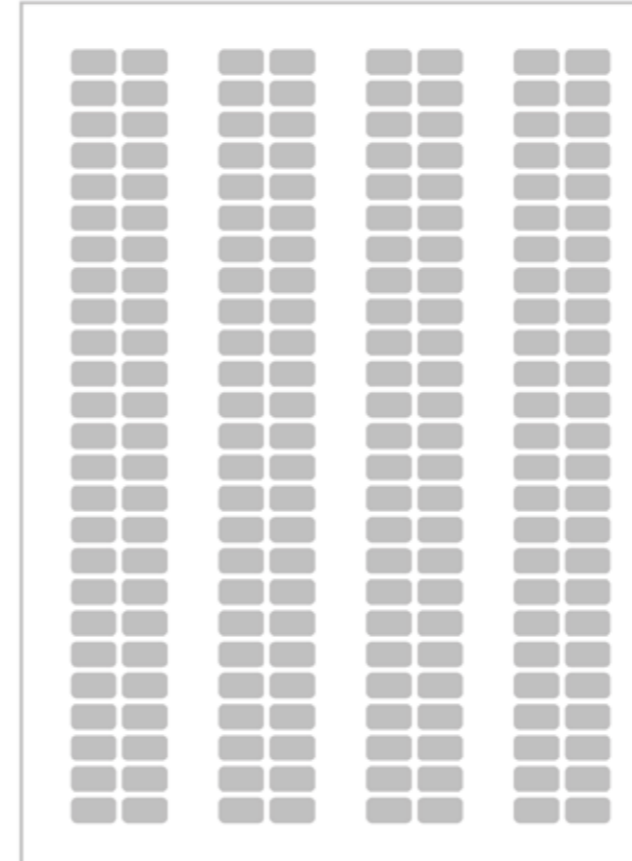

## ANALYSIS

UNIT	CAPACITY	LIMITATIONS
TIP-LIFT Total Lift Unit	200	N/A
Rear Loader	125	Wide isles are required, must accommodate both removed and removal vehicles
Side Loader	120	Must have access to the side of the vehicles, this limits storage to pods of four if vehicles are to be driven out.